

**Waterflow Detector**  
450PSI Size2"-8"  
**F6001**

**Specifications**

- Equipped with tamper resistant screws to prevent unauthorized entry.
- Two synchronized switches are enclosed in a durable terminal block. Terminals are easy to read and wire.
- Built-In mechanical time delay feature; minimizing the risk of false alarms due to pressure surges or air trapped in the system.
- Offers excellent performance during riser vibrations caused by large in-rushes of water.
- Designed and built for accuracy and repeatability.
- Flow sensitivity range: 4-10 GPM(15-38LPM).
- Contact rating: 8A@250VAC,  
3A@24VDC,  
2.5A@30VDC.
- UL Listed, FM Approved and GOST Certification.

**Working Pressure**

- 450 PSI

**Working Temperature**

- 0-68°C

**Corrosion Protection**


- Fusion Bonded Epoxy Coated Interior and Exterior or Enamel Spray Paint, Interior and Exterior.

**Material Specifications**

No.	Part Name	Material
1	Saddle	DI, A536 65-45-12
2	Holder	SS304+EPDM
3	Plate	Aluminium Alloy
4	Cover	Aluminium Alloy
5	Paddle	Plastic
6	Microswitch	Plastic
7	Gasket	EPDM
8	Retarding device	Plastic
9	Terminal Box	Plastic

**Notes:**

*Design and material are subject to change without notice.*

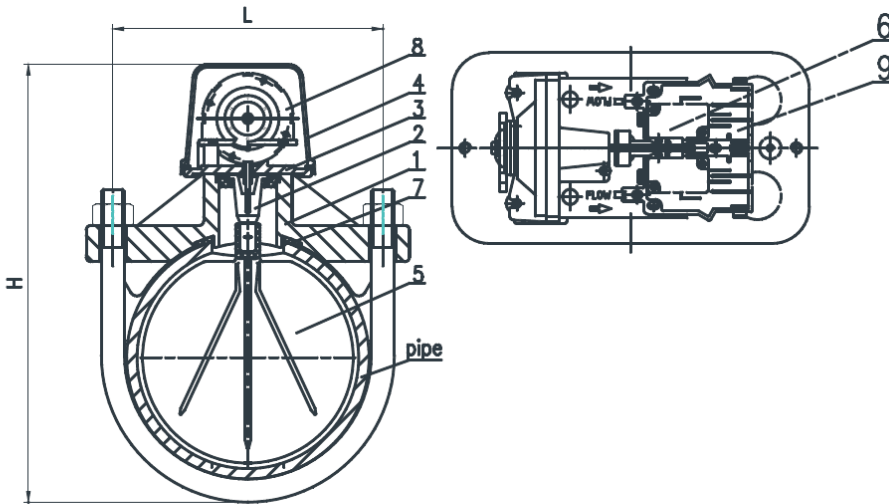

**Dimensions (mm)**

Size	DN50	DN65	DN80	DN100	DN125	DN150	DN200
L	84	92	104	133	160	187	239
H	190	200	220	245	270	300	350
Nominal Pipe Size OD.	60.3	73	88.9	114.3	141.3	168.3	219.1
Pipe Wall Thickness	2.77-3.91	3.05-5.16	3.05-5.49	3.05-6.02	3.40-6.55	3.40-7.11	3.76-8.18