

“Weilong” Swing Check Valve



“Weilong” Swing Check Valve

1. Valve Standard

Comply with BSEN 12334, BS 5153

Model 5101

2 Working Pressure and Temperature

Working pressure 16bars

Temperature from -10°C to 120°C


3. Flange Type

EN1092-2 PN16/25

Materials Specification

Part Name	Standard	Options on request
Body, Disc, Cover	Grey Cast Iron BS1561-EN-GJL-250	Spheroidal Graphite Cast Iron (Ductile Iron) BS EN1563-EN-GJS-400-15
Hanger Pin	Stainless Steel BS EN10088 Grade 1.4021	Stainless Steel BS EN10088 Grade 1.4401 / 1.4301 / 1.4057
Disc	Grey Cast Iron BS1561-EN-GJL-250	
Disc Trim	Bronze to BSEN1982 CC491K	Bronze to BSEN1982 CuSn10

“Weilong” Swing Check Valve

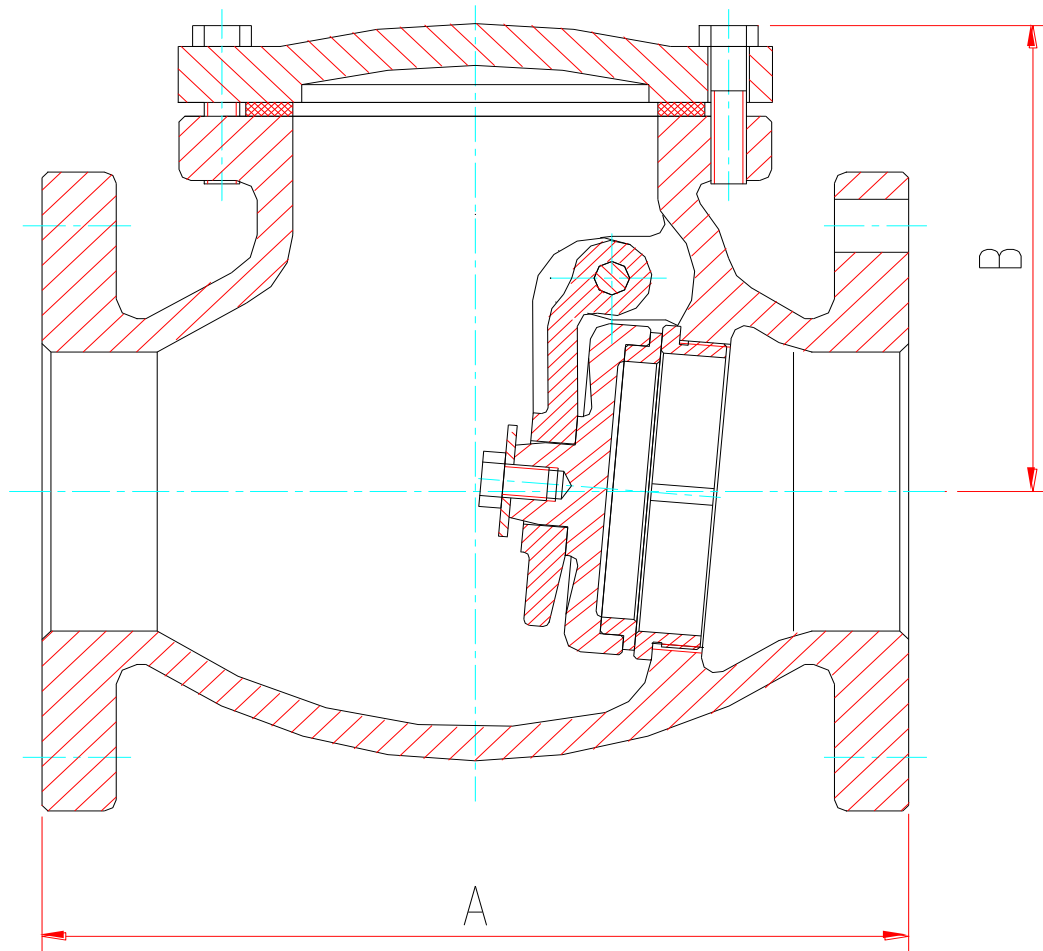

Dimensions (mm)

Size	50	65	80	100	125	150	200	250	300	350	400	450	500	600
A	203	216	241	292	330	356	495	622	699	787	914	914	1016	1219
B	125	137	147	166	190	217	265	300	342	402	472	500	514	605