

“Weilong” Swing Check Valve



WSD Approval No.: C20210934

“Weilong” Swing Check Valve

1. Valve Standard

Comply with BSEN 12334, BS 5153

Model 5101SEA

2 Working Pressure and Temperature

Working pressure 16bars

Temperature from -10°C to 120°C

3. Flange Type


EN1092-2 PN16/25

4. Internally and externally fusion bonded epoxy powder coated (FBE).

Materials Specification

Part Name	Standard
Body, Disc, Cover	Grey Cast Iron BS1561-EN-GJL-250
Hanger Pin	Stainless Steel BS EN10088 Grade 1.4401
Disc	Grey Cast Iron BS1561-EN-GJL-250
Disc Trim	Stainless Steel BS EN10088 Grade 1.4401

“Weilong” Swing Check Valve

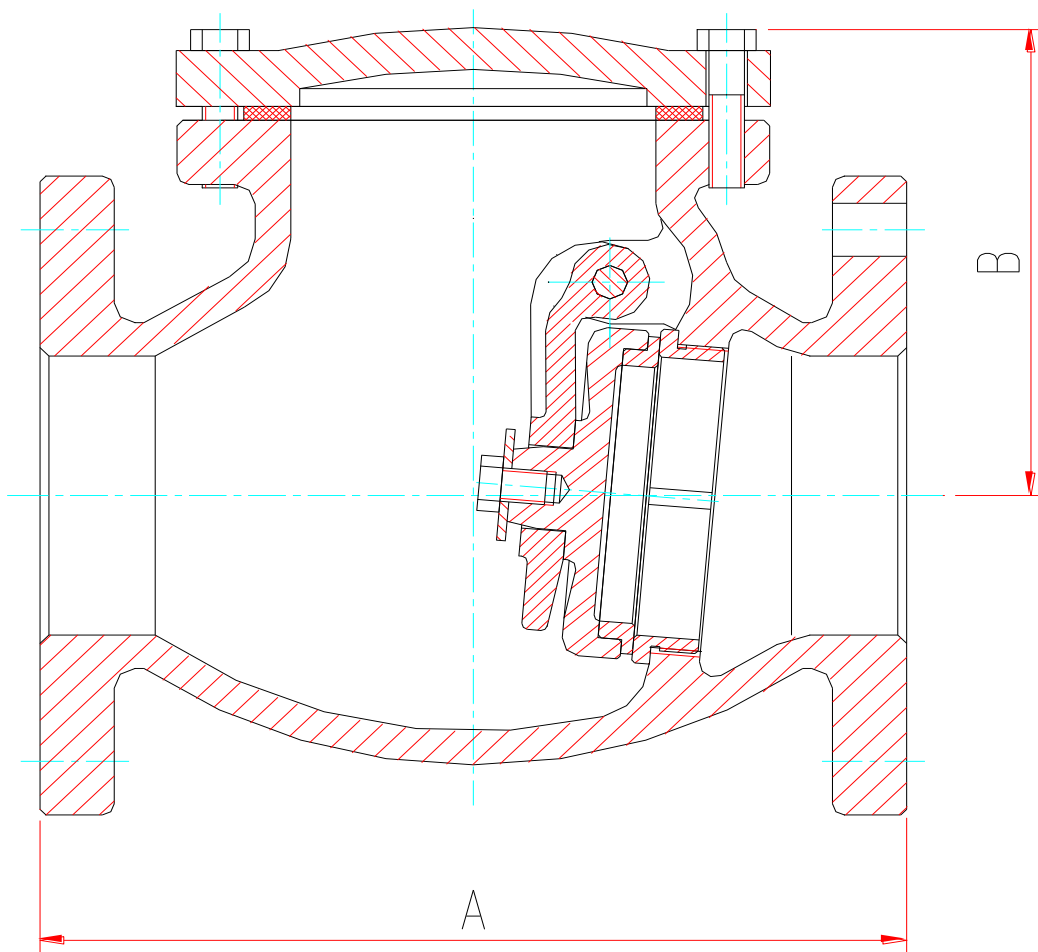

Dimensions (mm)

Size	50	65	80	100	125	150	200	250	300	350	400	450	500	600
A	203	216	241	292	330	356	495	622	699	787	914	914	1016	1219
B	125	137	147	166	190	217	265	300	342	402	472	500	514	605