



Fire Fighting



# Dorot Fire Fighting

## Control Solutions for Fire Fighting Applications



<b>Series 300 Basic Valves Description</b>	4
<b>Series 100 Basic Valves Description</b>	6
<b>Automatic Valves for Sprinkler Systems</b>	8
<b>DE/HL</b> Basic Deluge Valve	8
<b>DE/HM</b> Hydraulically Controlled Deluge Valve	8
<b>DE/EL</b> Electrically Controlled Deluge Valve	9
<b>DE/EL(CN)</b> Electrically Controlled Deluge Valve (Chinese standard)	9
<b>DE/RC</b> Electrically Controlled Deluge Valve (3-Way)	10
<b>DE/RCL</b> Electrically Controlled Deluge Valve with Manual Reset	10
<b>DE/RCE</b> Electrically Controlled Deluge Valve with Hydraulic / Pneumatic / Electric Reset	11
<b>DE/HRV</b> Hydraulically Controlled, Anti-Columnning Deluge Valve	12
<b>DE/HRV/EL</b> Electro-Hydraulically Controlled, Anti-Columnning Deluge Valve	12
<b>DE/PORV</b> Pneumatically Controlled Deluge Valve	13
<b>DE/EL/PORV</b> Electro-Pneumatically Controlled Deluge Valve	13
<b>DE/EL/PORV/DN</b> Double-Interlock Pre-action, Electric-Pneumatic Release System	14
<b>DE/PR</b> Pressure Regulating Deluge Valve	14
<b>Local and Remote Controlled Monitor Valves</b>	15
<b>MO/M</b> Manually Activated Monitor Valve	15
<b>MO/RC</b> Remote Hydraulic/Pneumatic Activated Monitor Valve	15
<b>MO/EL</b> Remote Electrically Activated Monitor Valve	15

**Automatic Distribution Valves** 16**PR/UL** Pressure Reducing Valve 16**PS/UL** Pressure Sustaining\Relief Valve 16**Water Level Control Valves** 17**FL** Modulating Float Controlled Valve 17**FLEL** Electric Float Controlled Valve 17**FLDI** Differential Float Pilot Controlled Valve 18**AL** Altitude Pilot Controlled Valve 18**Hydrants** 19**HY** Hydraulic Hydrant Valve 19**HY/PR** Hydraulic Pressure-Regulating Hydrant Valve 19**LEHAVA / ZIK** Hydrant Valve (Classic type) 19

## General Description

The Dorot Series 300 valves are automatic, hydraulically activated by the pressure of the pipeline, diaphragm actuated, globe and angle pattern control valves.

This valve is designed for use in any water supply application, including the controlling of water flow for deluge, pre-action or foam-water type fire protection sprinkler systems.

The valve consists of three major components: the body, the cover, and the diaphragm assembly.

The only moving part is the diaphragm assembly.

Pack-less construction and simplicity of design of the valve assure long service life, reliable operation and low maintenance.



## Features

- ▶ UL-listed with a wide range of control trims
- ▶ Fast opening and cushioned closure operation
- ▶ Reliable drip-tight shut off
- ▶ Simple and reliable design
- ▶ Easy installation and maintenance
- ▶ Double or single chamber actuation
- ▶ High-grade construction materials
- ▶ Regulation from near zero flow
- ▶ Low pressure losses at high flow rates

## Optional Features

- ▶ Latched opening or automatic reset
- ▶ Manual, Electric, Hydraulic and Pneumatic, UL-listed actuation trims
- ▶ Explosion-proof electronic devices
- ▶ Sea water service

## Approvals

The valve is UL listed as "Fire Pump Relief Valves" (QXZQ.EX4505), "Special Systems Water Control Valves" - Deluge (VLFT.EX6543) and Pressure Control (VLMN.EX6104) types to pressure rating of 175 psi and 350 psi PN16 and PN25 in sizes of 2" to 12" (50 to 300mm). Consult the UL listing guide or Dorot for a complete list of approved applications.

## Specifications

**Sizes:** Straight Flow 40-800 mm 1 $\frac{1}{2}$ " - 32"  
Angle 40-200 mm 1 $\frac{1}{2}$ " - 8"

### End Details:

Flanged: ISO PN10, 16 and 25  
ANSI B16.42 class 150 & 300  
AS Tables D & E, JIS  
Others upon request

Threaded: BSP or NPT

**Pressure rating:** 16 bar / 230 psi maximum  
25 bar / 360 psi maximum

**Temperature range:** Water to 80°C / 180°F max

## Materials

**Body & Cover\***: Ductile Iron ASTM A-536  
Cast Steel ASTM A216 WCB  
Stainless Steel ASTM A743 -  
CF8M, CF8, CF3M, 316  
Naval Bronze ASTM B61  
NAB Ni-Al Bronze ASTM B148


**Coating:** Polyester, Fusion Bonded Epoxy (FBE)  
(option UV Protected)

**Main valve trim\***: Stainless Steel & Bronze

**Elastomers**: Rubber, NR, NBR, EPDM, BUNA-N  
**Control trim & Accessories\***: Brass, Bronze, SST  
Monel, Special Materials


\* Other materials available upon request

### Principle of Operation

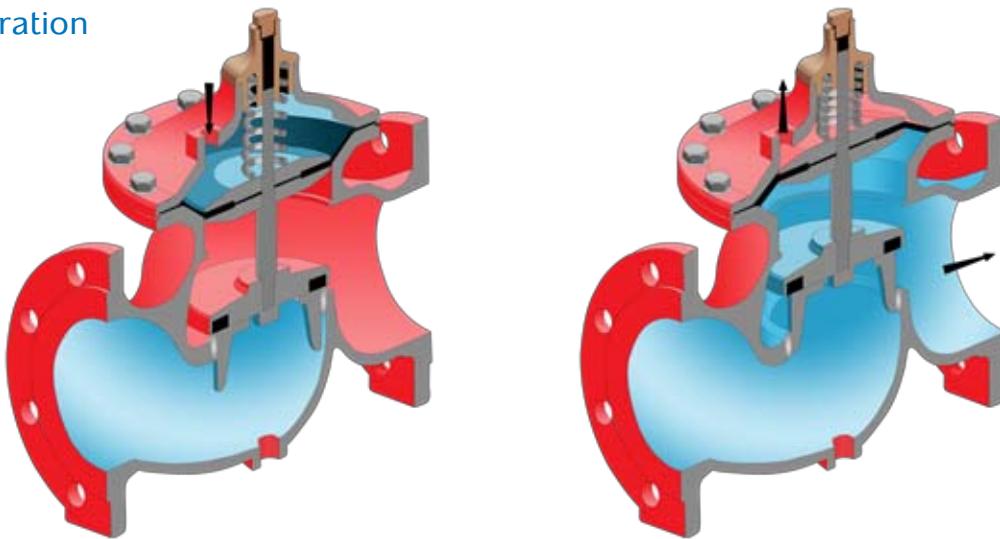

### Dimensions and Weights

Valve Size	50 (2")		65 (2 1/2")		80 (3")		100 (4")		150 (6")		200 (8")		250 (10")		300 (12")		350 (14")		400 (16")		
	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	
DIMENSIONS	FL	230	9 1/16	292	11 1/2	310	12 3/16	350	13 3/4	480	18 7/8	600	23 1/16	730	28 3/4	850	33 7/16	980	38 9/16	1100	43 5/16
	FH	185	7 5/16	185	7 5/16	230	9 1/16	240	8 7/16	330	13	390	15 3/8	520	20 1/2	635	25	635	25	855	33 5/8
	W	170	7	170	7	200	7	235	9	330	13	415	16	525	21	610	24	610	24	850	33
	FR	165	6 1/2	185	7 5/16	200	7 7/8	220	8 11/16	285	11 1/4	345	13 9/16	410	16 1/8	460	18 1/8	520	20 1/2	580	22 13/16
	TL	215	8 7/16	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	
	TH	209	8 1/4	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	
	TR	62	2 7/16	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	
	AL	208	8 3/16	N/A	N/A	250	9 13/16	295	11 1/16	405	16	505	19 7/8	N/A	N/A	N/A	N/A	N/A	N/A	N/A	
	AH	240	9 7/16	N/A	N/A	415	16 5/16	445	17 1/2	570	22 7/16	635	25	N/A	N/A	N/A	N/A	N/A	N/A	N/A	
	AB	125	4 15/16	N/A	N/A	150	5 7/8	173	6 13/16	240	9 7/16	300	11 13/16	N/A	N/A	N/A	N/A	N/A	N/A	N/A	
	AR	107	4 3/16	N/A	N/A	138	5 7/16	147	5 13/16	180	7 1/16	N/A	14 3/16	N/A	N/A	N/A	N/A	N/A	N/A	N/A	
Vol. Control Chamber lit./gal.	0.1 / 0.03	0.1 / 0.03	0.3 / 0.08	0.7 / 0.18		1.5 / 0.4		4.3 / 1.1		9.7 / 2.6		18.6 / 4.9		18.6 / 4.9		50 / 13.2					
Weight kg/lbs	12 / 26	13 / 29	22 / 48	37 / 82		80 / 176		157 / 346		245 / 540		405 / 892		510 / 1123		822 / 1810					

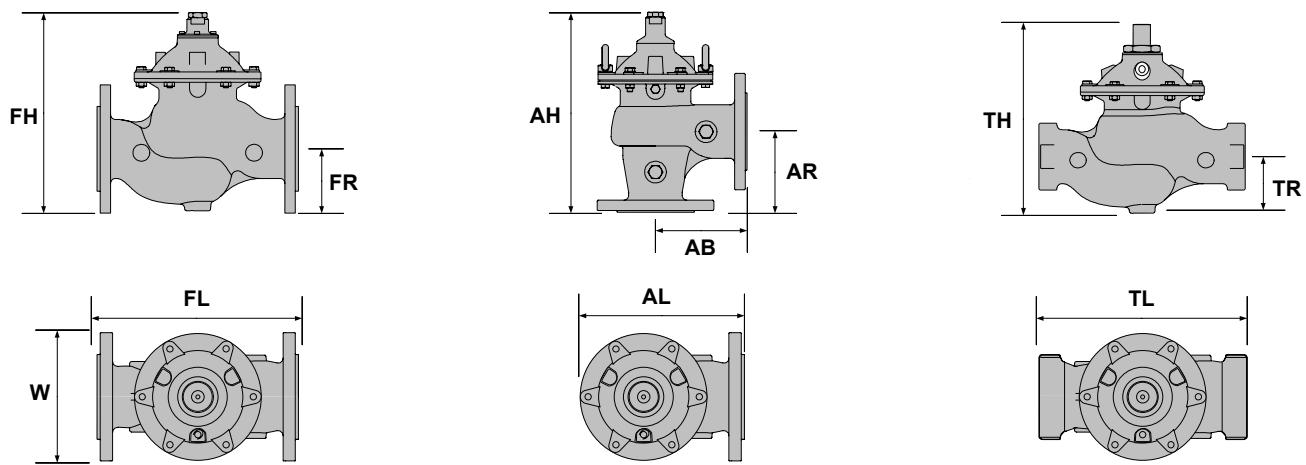

## General Description

The Dorot Series 100 valves are automatic, hydraulically activated by the pressure of the pipeline, direct diaphragm sealing weir type with proven reliable design.

This valve is designed for use in any water and Foam supply application, including the control of water flow to deluge, pre-action or foam-water type fire protection sprinkler systems.

The valve consists of three major components: body, cover and diaphragm. The only moving part is the diaphragm. Pack-less construction and simplicity of design of the valve assure long service life and low maintenance.



## Features

- ▶ UL-listed with a wide range of control trims
- ▶ Fast opening and cushioned closure operation
- ▶ Simple and reliable design
- ▶ Easy installation and maintenance
- ▶ High-grade construction materials
- ▶ Will regulate from near zero flow
- ▶ Exceptionally low pressure losses

## Optional Features

- ▶ Latched opening or automatic reset
- ▶ Manual, Electric, Hydraulic and Pneumatic, UL-listed actuation trims
- ▶ Explosion-proof electronic devices
- ▶ Sea water service

## Approvals

The valve is U.L. listed as "Fire Pump Relief Valves" (QXZQ.EX4505) and "Special Systems Water Control Valves" (VLFT.EX6543) to pressure rating of 175 psi in sizes of 2" to 10" (50 to 250mm).

Consult the UL listing guide or Dorot for a complete list of approved applications.

## Specifications

**Sizes:** Straight Flow 20-600 mm /  $\frac{3}{4}$ " - 24"  
Angle 40-150 mm /  $1\frac{1}{2}$ " - 6"

### End Details:

Flanged: ISO PN10, 16 and 25  
ANSI B16.42 class 150,  
250 & 300  
AS Tables D & E, JIS  
Others upon request

Threaded: BSP or NPT Grooved

**Pressure rating:** 16bar / 230 psi maximum

**Temperature range:** Water to 80°C / 180°F max

## Materials

**Body & Cover\***: Cast Iron ASTM A126  
Ductile Iron ASTM A-536  
Cast Steel ASTM A216 WCB  
Stainless Steel ASTM A743 -  
CF8M, CF8, CF3M, 316  
Naval Bronze ASTM B61  
NAB Ni-Al Bronze ASTM B148


**Coating:** Polyester, Fusion Bonded Epoxy (FBE)  
(option UV Protected)

**Elastomers:** Rubber, NR, NBR, EPDM, Buna-N

**Control trim & Accesories\*:** Brass, Bronze, SST  
Monel, Special Materials




\* Other materials available upon request

### Principle of Operation

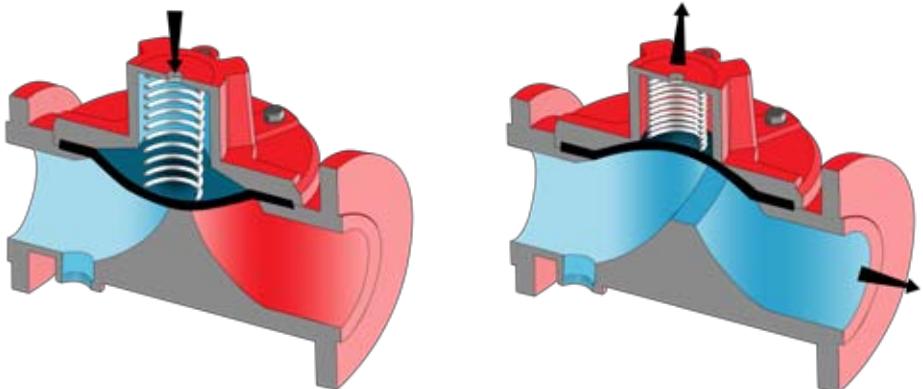

### Dimensions and Weights

Valve Size		50 (2")		80 (3")		100 (4")		150 (6")		200 (8")		250 (10")		300 (12")		350 (14")		400 (16")		450 (18")	
		mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch
77	L	200	7 <sup>13</sup> / <sub>16</sub>	285	11 <sup>13</sup> / <sub>16</sub>	305	12	390	15 <sup>5</sup> / <sub>16</sub>	460	18 <sup>1</sup> / <sub>8</sub>	535	21	580	22 <sup>13</sup> / <sub>16</sub>	580	22 <sup>13</sup> / <sub>16</sub>	980	38 <sup>9</sup> / <sub>16</sub>	1100	43 <sup>5</sup> / <sub>16</sub>
	H	166	6 <sup>1</sup> / <sub>2</sub>	200	7 <sup>13</sup> / <sub>16</sub>	230	9	314	12 <sup>5</sup> / <sub>16</sub>	400	15 <sup>11</sup> / <sub>16</sub>	445	17 <sup>1</sup> / <sub>2</sub>	495	19 <sup>3</sup> / <sub>8</sub>	495	19 <sup>3</sup> / <sub>8</sub>	990	39	1250	49 <sup>3</sup> / <sub>16</sub>
	R	85	3 <sup>5</sup> / <sub>16</sub>	105	4 <sup>1</sup> / <sub>8</sub>	110	4 <sup>5</sup> / <sub>16</sub>	145	5 <sup>11</sup> / <sub>16</sub>	170	6 <sup>5</sup> / <sub>8</sub>	205	8	240	9 <sup>3</sup> / <sub>8</sub>	270	10 <sup>5</sup> / <sub>8</sub>	610	24	850	33
	W	166	6 <sup>1</sup> / <sub>2</sub>	200	7 <sup>13</sup> / <sub>16</sub>	230	9	300	11 <sup>13</sup> / <sub>16</sub>	365	14 <sup>3</sup> / <sub>8</sub>	440	17 <sup>5</sup> / <sub>16</sub>	490	19 <sup>5</sup> / <sub>16</sub>	540	21 <sup>5</sup> / <sub>16</sub>	520	20 <sup>1</sup> / <sub>2</sub>	580	22 <sup>13</sup> / <sub>16</sub>
	Approx. Weight kg/lbs	7.7 / 17		18.2 / 40.1		24 / 53		49 / 108		86 / 190		125 / 276		167 / 368		172 / 379		N/A		N/A	
68	L	228	8 <sup>7</sup> / <sub>8</sub>	310	12 <sup>3</sup> / <sub>16</sub>	356	14	436	17 <sup>1</sup> / <sub>8</sub>	530	20 <sup>13</sup> / <sub>16</sub>	636	25	N/A	N/A	N/A	N/A	715	28 <sup>1</sup> / <sub>8</sub>	715	28 <sup>1</sup> / <sub>8</sub>
	H	169	6 <sup>5</sup> / <sub>8</sub>	237	9 <sup>5</sup> / <sub>16</sub>	263	10 <sup>5</sup> / <sub>16</sub>	378	14 <sup>13</sup> / <sub>16</sub>	481	18 <sup>7</sup> / <sub>8</sub>	546	21 <sup>1</sup> / <sub>2</sub>	N/A	N/A	N/A	N/A	830	32 <sup>5</sup> / <sub>8</sub>	830	32 <sup>5</sup> / <sub>8</sub>
	R	85	3 <sup>5</sup> / <sub>16</sub>	105	4 <sup>1</sup> / <sub>8</sub>	120	4 <sup>11</sup> / <sub>16</sub>	150	5 <sup>7</sup> / <sub>8</sub>	180	7	215	8 <sup>3</sup> / <sub>8</sub>	N/A	N/A	N/A	N/A	310	12 <sup>3</sup> / <sub>16</sub>	340	13 <sup>5</sup> / <sub>16</sub>
	W	175	6 <sup>7</sup> / <sub>8</sub>	200	7 <sup>13</sup> / <sub>16</sub>	260	10 <sup>3</sup> / <sub>16</sub>	320	12 <sup>5</sup> / <sub>8</sub>	400	15 <sup>11</sup> / <sub>16</sub>	495	19 <sup>3</sup> / <sub>8</sub>	N/A	N/A	N/A	N/A	830	32 <sup>5</sup> / <sub>8</sub>	830	32 <sup>5</sup> / <sub>8</sub>
	Approx. Weight kg/lbs	10 / 22		30 / 66.1		38 / 83.8		75 / 165.3		123 / 271		190 / 419		N/A		N/A		433 / 955		460 / 1014	
44	TL	188	7 <sup>3</sup> / <sub>8</sub>	316	12 <sup>3</sup> / <sub>8</sub>	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
	TH	115	4 <sup>1</sup> / <sub>2</sub>	135	5 <sup>5</sup> / <sub>16</sub>	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
	TR	42	1 <sup>5</sup> / <sub>8</sub>	53	2	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
	W	112	4 <sup>3</sup> / <sub>8</sub>	200	7 <sup>13</sup> / <sub>16</sub>	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
	Approx. Weight kg/lbs	3.2 / 7		11 / 24		N/A		N/A		N/A		N/A		N/A		N/A		N/A		N/A	
82	AL	N/A	N/A	174	6 <sup>13</sup> / <sub>16</sub>	180	7	230	9	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
	AH	N/A	N/A	278	11	300	11 <sup>13</sup> / <sub>16</sub>	380	15	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
	AR	N/A	N/A	47	1 <sup>13</sup> / <sub>16</sub>	60	2 <sup>5</sup> / <sub>16</sub>	82	3 <sup>3</sup> / <sub>16</sub>	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
	W	N/A	N/A	200	7 <sup>13</sup> / <sub>16</sub>	230	9	300	11 <sup>13</sup> / <sub>16</sub>	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
	Approx. Weight kg/lbs	N/A		18 / 39.6		21 / 46.2		45 / 99.2		N/A		N/A		N/A		N/A		N/A		N/A	

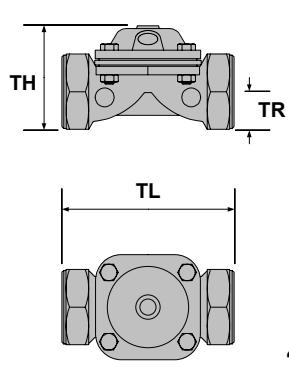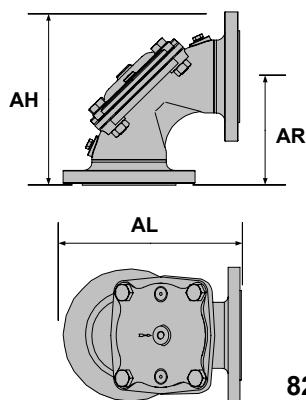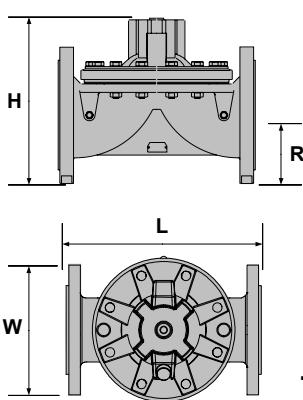

44

**DE/HL****Basic Deluge Valve****Basic, hydraulic operated deluge valve**

The valve maintains a closed position and instantly opens upon a hydraulic pressure drop in a pressurized sensor\activation line.

**Features:**

- ▶ Simple structure
- ▶ Automatic reset - optional latch operation
- ▶ The application is based on the UL listed valves

**Applicable for:**

- ▶ Deluge
- ▶ Dry pipe
- ▶ Single-Interlock Pre-Action
- ▶ Remote activation monitor systems
- ▶ Water, Sea water, Foam solution or Foam concentrate

**DE/HM****Hydraulically Controlled Deluge Valve****Hydraulic pilot operated control valve**

The valve maintains a closed position and instantly opens upon a hydraulic pressure drop in a pressurized sprinkler system.

**Features:**

- ▶ UL certified
- ▶ Simple structure
- ▶ Automatic reset – optional latch operation

**Applicable for:**

- ▶ Deluge
- ▶ Dry pipe
- ▶ Single-Interlock Pre-Action
- ▶ Water, Sea water, Foam solution or Foam concentrate



30U-DE/HM



68-DE/HM

DE/EL



Electrically Controlled Deluge Valve  
(2W solenoid)

### Electric solenoid operated control valve

The valve maintains a closed position and instantly opens by energizing a solenoid valve.

#### Features:

- ▶ UL certified
- ▶ Simple structure
- ▶ Automatic reset – optional latch operation



30U-DE/EL

#### Applicable for:

- ▶ Deluge
- ▶ Dry pipe
- ▶ Single or double Interlock Pre-Action
- ▶ Water, Sea water, Foam solution or Foam concentrate

DE/EL(CN)



Electrically Controlled Deluge Valve  
(Chinese standard)



68-DE/EL

### Electrically operated, latching relay controlled valve

The valve maintains a closed position and instantly opens by energizing a solenoid valve. The valve will close only after a manual reset is activated.

#### Features:

- ▶ Chinese standard certified
- ▶ Simple structure
- ▶ Latching operation



30-DE/EL (CN)

#### Applicable for:

- ▶ Deluge
- ▶ Dry pipe
- ▶ Single-Interlock Pre-Action
- ▶ Water, Sea water, Foam solution or Foam concentrate

DE/RC

**Electrically Controlled Deluge Valve  
(3W Solenoid)****Electrically operated, relay controlled valve**

The valve maintains a closed position and instantly opens by energizing a solenoid valve.

**Features:**

- ▶ UL certified
- ▶ Simple structure
- ▶ Automatic reset – optional latch operation

**Applicable for:**

- ▶ Deluge
- ▶ Dry pipe
- ▶ Single or double Interlock Pre-Action
- ▶ Water, Sea water, Foam solution or Foam concentrate



30U-DE/RC



68-DE/RC

DE/RCL

**Electrically Controlled Deluge Valve  
with Manual Reset****Electrically operated, latching relay controlled valve**

The valve maintains a closed position and instantly opens by energizing a solenoid valve.

The valve will close only after a manual reset is activated.

**Features:**

- ▶ UL certified
- ▶ Simple structure
- ▶ Latching operation



30U-DE/RCL



68-DE/RCL

DE/RCE



Electrically Controlled Deluge Valve  
with Hydraulic / Pneumatic / Electric Reset

### Electrically operated, latching relay controlled valve

The valve maintains a closed position and instantly opens by energizing a solenoid valve.

The valve will close only after a manual reset is activated or a reset pressure command is applied to the relay.

#### Features:

- ▶ UL certified
- ▶ Simple structure
- ▶ Latching operation

#### Applicable for:

- ▶ Deluge
- ▶ Dry pipe
- ▶ Single or double Interlock Pre-Action
- ▶ Water, Sea water, Foam solution or Foam concentrate



30U-DE/RC



68-DE/PORV



30U-DE/RCL



68-DE/EL/PORV

## DE/HRV



## Hydraulically Controlled, Anti-Columning Deluge Valve

**Hydraulic pilot operated control valve**

The valve maintains a closed position and instantly opens upon a hydraulic pressure drop in a pressurized sprinkler system.

**Features:**

- ▶ Simple structure
- ▶ Automatic reset – optional latch operation
- ▶ The application is based on the UL listed valves

**Applicable for:**

- ▶ Deluge
- ▶ Dry pipe
- ▶ Single-Interlock Pre-Action
- ▶ Water, Sea water, Foam solution or Foam concentrate



30U-DE/HRV



68-DE/HRV

## DE/HRV/EL

Electro-Hydraulically Controlled,  
Anti-Columning Deluge Valve**Hydraulic pilot and Electrically operated control valve**

The valve maintains a closed position and instantly opens upon an hydraulic pressure drop in a pressurized sprinkler system or by energizing a solenoid valve.

**Features:**

- ▶ UL certified
- ▶ Simple structure
- ▶ Automatic reset – optional latch operation

**Applicable for:**

- ▶ Deluge
- ▶ Dry pipe
- ▶ Single-Interlock Pre-Action
- ▶ Water, Sea water, Foam solution or Foam concentrate



30U-DE/HRV/EL



68-DE/HRV/EL

### DE/PORV

#### Pneumatically Controlled Deluge Valve

##### Pneumatic Air/Gas, pilot operated control valve

The valve maintains a closed position and instantly opens upon air/gas pressure drop in a pressurized sprinkler system or manual "in situ" emergency activation.

##### Features:

- UL certified
- Simple structure
- Automatic reset – optional latch operation

##### Applicable for:

- Deluge
- Dry pipe
- Single-Interlock Pre-Action
- Water, Sea water, Foam solution or Foam concentrate



### DE/EL/PORV

#### Electro-Pneumatically Controlled Deluge Valve

##### Pneumatic Air/Gas pilot and Electrically operated control valve

The valve maintains a closed position and instantly opens upon air/gas pressure drop in a pressurized sprinkler system or by energizing a solenoid valve or manual "in situ" emergency activation.

##### Features:

- UL certified
- Simple structure
- Automatic reset - optional latch operation

##### Applicable for:

- Deluge
- Dry pipe
- Single-Interlock Pre-Action
- Water, Sea water, Foam solution or Foam concentrate



## DE/EL/PORV/DN



Double-Interlock Pre-action,  
Electric-Pneumatic Release System

**Pneumatically and Electrically operated control valve**

The valve maintains a closed position and instantly opens upon air/gas pressure drop in a pressurized sprinkler system and energizing a solenoid valve simultaneously or manual "in situ" emergency activation

**Features:**

- ▶ UL certified
- ▶ Simple structure
- ▶ Automatic reset – optional latch operation

**Applicable for:**

- ▶ Double-Interlock Pre-Action
- ▶ Water, Sea water, Foam solution or Foam concentrate



30U-DE/EL/PORV/DN



68-DE/EL/PORV/DN

## DE/PR

## Pressure Control Deluge Valve

**Pressure control deluge valve**

The valve opens upon activation from an auxiliary control system, and maintains a pre-determined fixed downstream pressure, regardless of supply pressure or flow variations.

**Features:**

- ▶ Simple structure
- ▶ Will regulate from zero to full flow with no need for additional throttling plug or by-pass valves
- ▶ Same low pressure losses as in the basic valve
- ▶ Applicable with any deluge activation control system
- ▶ The application is based on the UL listed valves

**Applicable for:**

- ▶ Water, Sea water, Foam solution or Foam concentrate



30-DE/PR



68-DE/PR

### MO/M

#### Manually Activated Monitor Valve

The valve is controlled manually by a selector that allows the user to select the closed or open position of the valve. The control is effected effortlessly and quickly, even under high pressure conditions.

##### Features:

- ▶ Effortless open\close activation
- ▶ Fast response
- ▶ Simple and reliable design
- ▶ Easy installation and maintenance
- ▶ The application is based on the UL listed valves



77-M

### MO/RC

#### Remote Hydraulic/Pneumatic Activated Monitor Valve

A 3-way relay valve, activated by hydraulic or pneumatic pressure command, which opens or closes the main valve. The standard valve is supplied in the “normally closed” position. The “normally open” position is optional.



77-RC

##### Features:

- ▶ Fast response, even for long control lines
- ▶ Simple and reliable design
- ▶ Easy installation and maintenance
- ▶ The application is based on the UL listed valves



30U-DE/EL

### MO/EL

#### Remote Electrically Activated Monitor Valve

A 3-way solenoid valve, activated by an electric current or an electric pulse, opens or closes the main valve. The standard valve is supplied in the “normally closed” position. The “normally open” position is optional. Electric activation can be added to other control applications on request.



68-DE/EL

##### Features:

- ▶ Low power electric activation
- ▶ Simple and reliable design
- ▶ Easy installation and maintenance
- ▶ The application is based on the UL listed valves



### Pressure Reducing Valve

#### Hydraulic pressure-reducing valve

The valve maintains a pre-set fixed downstream pressure, regardless of upstream pressure or flow rate variations.

#### Features:

- ▶ UL certified
- ▶ PN16/230psi and PN25/360psi pressure rated valves
- ▶ Will regulate from zero to full flow with no need for additional throttling plug or by-pass valves.
- ▶ Same low pressure losses as in the basic valve
- ▶ Simple structure

#### Applicable for:

- ▶ Water, Sea water, Foam solution or Foam concentrate



30-PR/UL



### Pressure Sustaining/Relief Valve

#### Hydraulic pressure sustaining/relief valve

The valve maintains a pre-set fixed upstream pressure, regardless of downstream pressure or flow rate variations.

The valve will be closed drip tight when the upstream pressure is lower than the set value.



30-PS/UL



47-PS/UL

#### Features:

- ▶ UL certified Fire Pump Relief Valve
- ▶ PN16/230psi and PN25/360psi pressure rated valves
- ▶ Will regulate from zero to full flow with no need for additional throttling plug or by-pass valves.
- ▶ Same low pressure losses as in the basic valve
- ▶ Simple structure

#### Applicable for:

- ▶ Water, Sea water, Foam solution or Foam concentrate

### FL

#### Modulating Float Controlled Valve

The main valve is controlled by a float valve, located in the tank or reservoir and set at the required maximum water level. The valve maintains the maximum level continuously.

##### Features:

- ▶ Accurate level control.
- ▶ Simple and reliable design
- ▶ Easy installation and maintenance
- ▶ The application is based on the UL listed valves



### FLEL

#### Electric Float Controlled Valve

An electric sensor float, located in the tank/reservoir, sends a command to a solenoid controlled valve. The main valve will fully open when the solenoid is activated and closes drip tight when the solenoid is de-energized, thus enabling accurate and reliable differential level control.

Optional Addition: Surge-Preventing Closure.

##### Features:

- ▶ Accurate differential level control
- ▶ Low power electric activation
- ▶ Fast response
- ▶ Simple and reliable design
- ▶ Easy installation and maintenance
- ▶ The application is based on the UL listed valves



**FLDI****Differential Float Pilot Controlled Valve**

A Float valve controls the main valve, closing it when the water reaches maximum level, and opening it when the water drops to its preset minimum level.

The differential between the maximum and the minimum levels is adjustable.

Optional Addition: Stepped Surge-Preventing Closure.



30-FLDI

**Features:**

- ▶ Accurate differential level control
- ▶ Adjustable differential
- ▶ Fast response
- ▶ Simple and reliable design
- ▶ Easy installation and maintenance
- ▶ The application is based on the UL listed valves



68-FLDI

**AL****Altitude Pilot Controlled Valve**

The main valve is controlled by a highly sensitive pilot, located outside the tank.

The pilot opens or closes the valve in response to the static pressure of the water. The pilot allows for differential adjustments between the maximum and minimum level.

Optional Addition: Surge-Preventing Closure.



30-AL

**Features:**

- ▶ Accurate differential level control
- ▶ Fast response
- ▶ Easy access - no float is located in the tank\reservoir
- ▶ Simple and reliable design
- ▶ Easy installation and maintenance
- ▶ The application is based on the UL listed valves



68-AL

**HY****Hydraulic Hydrant Valve**

The valve is controlled manually by a selector that allows the user to select the closed or open position of the valve. The control is affected effortlessly and quickly, even under high pressure conditions. The opening speed is controlled by a vent orifice.

**Features:**

- ▶ Effortless open\close activation
- ▶ Controlled response
- ▶ Simple and reliable design
- ▶ Easy installation and maintenance



44-HY

**HY/PR****Hydraulic Pressure-Regulating Hydrant Valve**

The valve is controlled manually by a selector that allows the user to select the closed or open position of the valve. The control is affected effortlessly and quickly, even under high pressure conditions. The opening speed is controlled by a vent orifice.



82-HY

**Features:**

- ▶ Effortless open\close activation
- ▶ Controlled response
- ▶ Simple and reliable design
- ▶ Easy installation and maintenance



LEHAVA

**LEHAVA / ZIK****Hydrant Valve**

3" (80mm) Angle Hydrant, Non-rising stem, Ductile Iron Body and Bronze seat.




LEHAVA

**Features:**

- ▶ Low operation torque
- ▶ High grade materials
- ▶ Available as a double (twin) valve assembly



ZIK

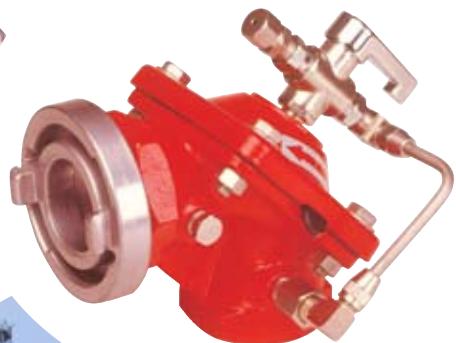

Innovation  
Innovation  
Expertise  
Expertise  
Reliability  
Reliability

Hundreds of companies in the industrial, civil engineering, municipal and agricultural sectors around the world have chosen DOROT's innovative and field-proven technologies. Since its establishment in 1946, DOROT leads the hydraulic valves market with continued innovation, uncompromising excellence and firm commitment to its customers, consulting and supporting them through all stages of a project and overcoming challenges in R&D, design, implementation, and maintenance.



[www.dorot.com](http://www.dorot.com)

