

“Weilong” Globe Valve, PN16



“Weilong” Globe Valve, PN16

1. Valve Standard

Comply with BS EN 1092-2, BS EN 13789, BS EN 1561

Suitable for Fresh, F/S system

Model No.: 6123

2. Working Pressure and Temperature

Working pressure 16bars

Temperature from -10°C to 85°C for EPDM

3. Flange Type

EN 1092-2 PN16


4. Operator

Handwheel type

5. Epoxy Coating material approval for potable water service to BS6920 (WRAS No.1603543) EPDM Rubber material sheet material approval for BS6920 (WRAS No.1811516)

Part Name	Standard
Body, Bonnet Hand wheel	Cast Iron BS EN 1561 EN-GJS-250
Stem	Stainless Steel BS EN 10088-1 Grade 1.4021 (420)

“Weilong” Globe Valve, PN16

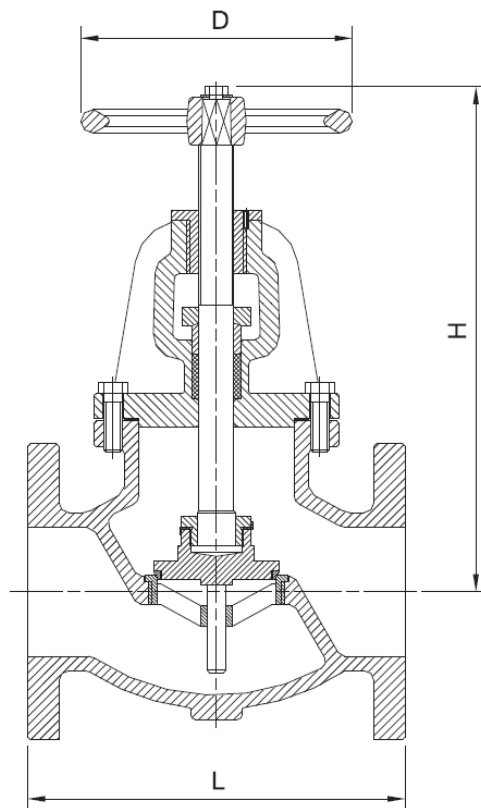

Dimensions (mm)

SIZE	80	100	150	200
L	241	292	356	495
H	345	389	511	580
D	190	305	305	355