

“Weilong” Wafer Silent Check Valve, 5312-25




“Weilong” Wafer Silent Check Valve, 5312-25

1. **Standard** : Comply with BS EN 12334, BS 5153
2. **Working Pressure and Temperature** :
Working pressure 25bars
Temperature from -10°C to 85°C (EPDM seat O-ring)
3. **Flange Type** : EN1092-1,2,3 PN25
4. Epoxy Coating material approval for potable water service to “BS6920-1:2000 and or 2014” (WRAS No.1603543)
5. EPDM Rubber material sheet material approval for BS6920 (WRAS No.1811516)

Materials Specification

Part Name	For Fresh & F/S system	For Flush Water system
Body	Spheroidal Graphite Cast Iron (Ductile Iron) BS EN1563 EN-GJS-400-15	Spheroidal Graphite Cast Iron (Ductile Iron) BS EN1563 EN-GJS-400-15
Spring	Stainless Steel BS EN 10088-1 Grade 1.4301 (SS304)	Stainless Steel BS EN 10088-1 Grade 1.4401 (SS316)
Disc / Seat	Stainless Steel BS EN 10088-1 Grade 1.4301 (SS304)	Stainless Steel BS EN 10088-1 Grade 1.4401 (SS316)

“Weilong” Wafer Silent Check Valve, 5312-25

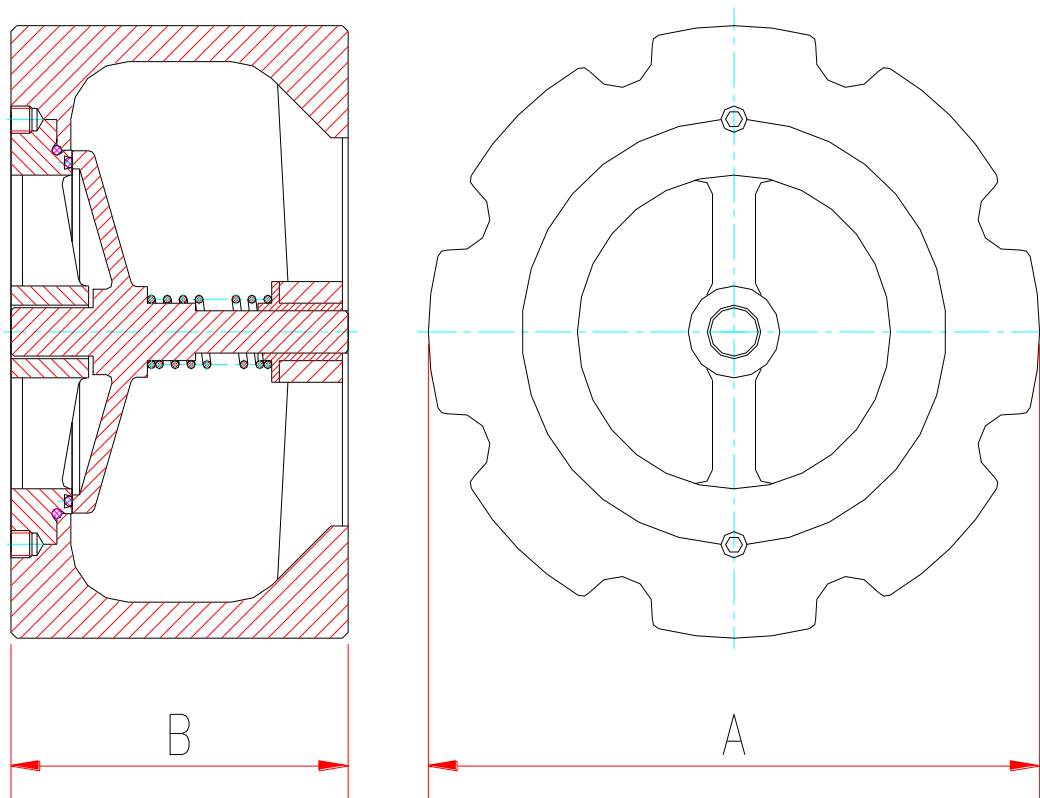

Dimensions (mm)

Size	50	65	80	100	150	200
A	113	127	150	188	248	340
B	67	73	80	102	140	165